


Creating Special Labels

Creating Labels for Patch Panel

You can create the optimal labels for your patch panel by setting the label length and number of blocks.

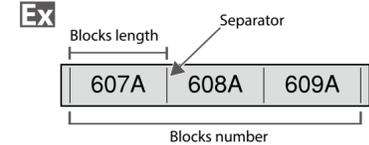


- Press **[F6]**.
- Select the length type with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Blocks".
Blocks: Sets the length by block length.
Label: Sets the length by label length.
- Enter the blocks length and then press **[OK]**.
Setting range: 0.25 to 30 cm
- Enter the blocks number and then press **[OK]**.
In this example, we will enter "3".
Setting range: 1 to 99
- Select the type of separator with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Line".
- Select the orientation with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Hori.".

Hori.	607A	608A	609A
Vert.1	001	002	003
Vert.2	001	002	003
- Enter the text.
You can create labels with sequence numbers.
For details, see "Creating Labels with Block Sequence Numbers Assigned"
- Press **[F6]**.

Creating Labels for Block-66

You can create labels for Block-66 so that huge number of connectors can easily be identified.

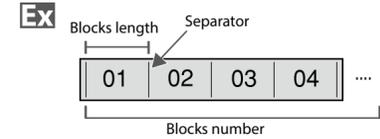


- Press **[F6]**.
- Select the length type with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Blocks".
Blocks: Sets the length by block length.
Label: Sets the length by label length.
- Enter the blocks length and then press **[OK]**.
Setting range: 0.25 to 30 cm
- Enter the blocks number and then press **[OK]**.
In this example, we will enter "4".
Setting range: 1 to 99
- Select the type of separator with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Line".
- Select the orientation with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Hori.".

Hori.	607A	608A	609A
Vert.1	001	002	003
Vert.2	001	002	003
- Enter the text.
You can create labels with sequence numbers.
For details, see "Creating Labels with Block Sequence Numbers Assigned"
- Press **[F6]**.

Creating Labels for Faceplate

Text can be automatically placed at the center of a block. This enables you to easily create a label suitable for the size of the area where it will be affixed.



- Press **[F6]**.
- Enter the label length and then press **[OK]**.
Setting range: 1 to 99.9 cm
- Enter the blocks number and then press **[OK]**.
In this example, we will enter "2".
Setting range: 1 to 99
- Select the orientation with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Hori.".

Hori.	001	002	003
Vert.1	001	002	003
Vert.2	001	002	003
- Enter the text.
- Press **[F6]**.

Creating Barcode Labels


MEMO
• You may not be able to add a barcode depending on the label type you create.
• Only up to two barcodes can be inserted in one label.

Supported barcode types:
EAN-8, EAN-13, CODE128, CODE39, QR CODE, ITF, CODABAR, UPC-A, UPC-E

- Press **[F6]**.
- Select an item with **[<] / [>]** and press **[OK]**.
Move on to the next options until the setting is complete.
- Enter the alphanumeric characters for the barcode and then press **[OK]**.
- Press **[F6]**.

Creating Labels for Punch Block

You can create labels to identify at a glance the numbers for the wires or pins connected to a punch block.




- Press **[F6]**.
- Select the blocks type with **[<] / [>]** and then press **[OK]**.
In this example, we will select "4pairs".
Blank: Creates a table of two rows and one column.
- Select the text type with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Pins".

1	4	8	12	16	20	24
25	28	32	36	40	44	48
- Enter the upper count and then press **[OK]**.
In this example, we will enter "1".
- Enter the lower count and then press **[OK]**.
In this example, "25" is entered automatically.
- Enter the label length and then press **[OK]**.
Setting range: 1 to 99.9 cm
- Press **[F6]**.

Creating Labels to Wrap Around Cable

You can repeatedly print text so that it can be seen regardless of the angle from which the cable is viewed.

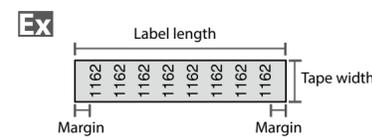


- Press **[F6]**.
- Select the length type with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Length".
Dia: Sets the length by cable diameter.
Length: Sets the length by label length.
- Enter the label length and then press **[OK]**.
Setting range: 1 to 99.9cm
- Select On or Off of repeat text with **[<] / [>]** and then press **[OK]**.
In this example, we will select "On".

On	1162	1162	1162	1162	1162	1162
Off	1162					
- Select the type of margins with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Long".
Tape/3: Sets margins that are a 1/3 of the tape width.
Tape: Sets margins that are equal to the tape width.
- Enter the text.
- Press **[F6]**.

Creating Labels to Wrap around Cable like a Flag

This label is useful for differentiating cables because the flag portion of the label wrapped around the cable is easy to see.



- Press **[F6]**.
- Select the setting method of space length with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Length".
Dia: Sets the length by cable diameter.
Length: Sets the length by space length.
- Enter the space length and then press **[OK]**.
Setting range: 0.25 to 30 cm
- Enter the text length and then press **[OK]**.
Setting range: 0.25 to 30cm
- Select the type of separator with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Line".
- Select the orientation with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Hori.2".


Hori.1	USB A001	USB A001
Hori.2	USB A001	A001
Vert.1	001	001
Vert.2	001	A001
- Enter the text of block 1 and then press **[Enter]**.
- Enter the text of block 2.
- Press **[F6]**.

Creating Labels with Symbol

- Press **[F6]**.
 - Select a category with **[<] / [>]** and press **[OK]**.
 - Select a symbol with **[<] / [>]** and press **[OK]**.
 - Press **[F6]**.
- MEMO**
For available symbols, see "Symbol List" on the separate sheet.

Creating Multiple Labels at Once

You can create many labels at once.

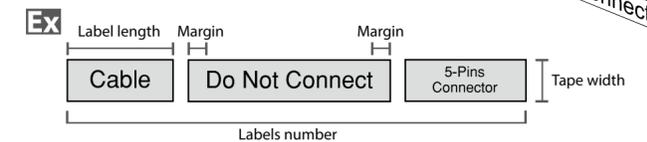

- Press **[F6]**.
- Select the label length with **[<] / [>]** and then press **[OK]**.
Auto: Automatically adjusts the label length depending on the length of text.
Set: Sets the label length.
Setting range: 0.25 to 30 cm
- Enter the labels number and then press **[OK]**.
In this example, we will enter "3".
- Select the type of margins with **[<] / [>]** and then press **[OK]**.
Tape/3: Sets margins that are a 1/3 of the tape width.
Tape: Sets margins that are equal to the tape width.
- Select the orientation with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Hori.".

Hori.	012
Vert.1	012
Vert.2	012
- Enter "Cable" and then press **[Enter]**.
Similarly for other labels, enter text and press **[Enter]**.
- Press **[F6]**.

Creating Labels with Dedicated Tape

Die-Cut label
Use the dedicated Die-Cut label.
You can print on precut Rectangle, Oval, and Circle.




- Select the orientation with **[<] / [>]** and then press **[OK]**.
In this example, we will select "Hori.".

Hori.	ABC
Vert.	ABC
- Enter the text.
You can adjust the position of the text.
For details, see "Changing the Printer Settings."
- Press **[F6]**.

Self-Lamination Overwrap


Use the dedicated Self-Lamination Overwrap.
This label tape comes with transparent film. The film can be wrapped around the label to prevent it from getting dirty.



- Enter the label length and then press **[OK]**.
Setting range: 1 to 99.9 cm
- Enter the text.
- Press **[F6]**.

Creating Sequentially Numbered Labels


The number is automatically incremented each time a label is printed. Up to four digits including numbers (0 to 9) and alphabet letters (a to z and A to Z) can be entered.



- Press **[F6]**.
- Enter the start value of the sequential numbers and then press **[OK]**.
In this example, we will enter "0001".
- Select the number of repetition with **[<] / [>]** and then press **[OK]**.
In this example, we will select "2 times".
- Press **[F6]**.
- Select "Print copies" with **[<] / [>]** and then press **[OK]**.
- Enter the number of print copies and then press **[OK]**.
In this example, we will enter "6".
- Select "Start print?" with **[<] / [>]** and then press **[OK]**.
Printing starts.

Creating Labels with Block Sequence Numbers Assigned

You can assign sequential numbers to blocks. Up to four digits including numbers (0 to 9) and alphabet letters (a to z and A to Z) can be entered.



- Create the blocks in advance.
In this example, we have created three blocks.
- Press **[F6]**.
 - Enter the start value of the sequential numbers and then press **[OK]**.
In this example, we will enter "CN01".
Sequential numbers are automatically assigned to block 2 and block 3.
 - Select the number of repetition with **[<] / [>]** and then press **[OK]**.
In this example, we will select "1 time".
 - Press **[F6]**.



Customizing Labels

Setting the Format and Style (Edit menu)

You can decorate your label by setting the following.

MEMO
The setting items displayed when you press  differ depending on the label type you create.

Layout
Left, Center, Justify, Right
Adjusts the layout when multiple lines are used.

Frame & Table
Decorates the text with a frame or inserts a table.

Separator
Decorates the text of a die cut label with a frame.

Style
Outline, Normal, Gray, Shadow, S+O
Applies a character style to text.

Char. spacing
None, Narrow, Normal, Wide
Sets the inter-character spacing.

Border & Line
Strikeout, Underline, None, Border, Round brdr, Shading, Brdr mesh, Round mesh
Applies border, underline, shade etc. to text.

Char. Width
Smaller, Small, Narrow, Normal, Wide
This allows you to change the width or height of characters.

Background
None, 1 Wave, 2 Diamond1, 3 Diamond2, 4 Snow, 5 Flower, 6 Star, 7 Cards, 8 Arabesq., 9 Mesh, 10Dotted
Sets the background pattern.

Bold & Italic
Italic, Normal, Bold, B+I
Changes the text in bold or italics.

Length
This setting is the same as when  is pressed.
 4 "Setting the Label Length"

Margins
This setting is the same as when  is pressed.
 4 "Setting the Margins"

Orientation
|AB|A , |< ▢|, |▢ ▢|
Sets the orientation of the text.

Font size
This setting is the same as when  is pressed.
 4 "Changing the Font Size"

Font
This setting is the same as when  +  is pressed.
 4 "Changing the Font"

Color Reversal
On, Off
When set to "On", creates label with the text color and tape color reversed.

Procedure for setting

- Place the cursor.**
Place the cursor on the left of the characters to which you want to apply a function.
If you apply the function to a specific line or block, confirm that the cursor is in the line or block.
- Press .**
Example: to apply "Bold & Italic"
- Select "Bold & Italic" with  and press .**
- Select "B + I" with  and press .**
- Select an area to which you want to apply the function with  and press .**
When "Character" is selected, the function is applied to all characters on the right of the cursor.

Changing the Font Size

You can change the font size of text or a block line by line. Among the preset setting items, select one with the same number of lines as that of the text or block you want to change.

MEMO
You may not be able to change the font size depending on the label type you create.

- Press .
- Each time you press , the font size changes.

Changing the Font +

Changes the font type of text.

- Press  + .
- Each time you press  + , the font changes.

SansS. Roman

Changing the Text Orientation +

Changes the text orientation to vertical or horizontal.

MEMO
You may not be able to change the text orientation depending on the label type you create.

- Press  + .
 - Each time you press  + , the setting switches between "Horizontal" and "Vertical".
- Horizontal
Vertical

When creating "Patch Panel", "Block-66", "Faceplate", or "Mix-Len"

- Press  + .
 - Select the orientation with  and press .
- Hori.
Vert.1
Vert.2

Setting the Label Length

You can set the length of label or block.

MEMO
• This cannot be set for a die cut label.
• When creating a special label, you can set the length again. Setting items for special label is displayed after pressing .

- Press .
- Select the setting method of the length with  and press .

Auto: Automatically adjusts the label length depending on the length of text.
Set: Sets the label length. Setting range: 1 to 99.9 cm

- Select the alignment for the text with  and press .

Left, Center, Justify, Right

Setting the Margins

Sets the left and right margins.

MEMO
You may not be able to set the margins depending on the label type you create.

- Press .
- Select the type of margins with  and press .

Tape width /3: Sets margins that are a 1/3 of the tape width.
Tape width: Sets margins that are equal to the tape width.

Adding Block

By dividing text into blocks, you can change the style and the number of lines block-by-block.

Display

Label

Block 1 Block 2

- Press .
- A new block is started from the character next to the cursor.

→
 →

Saving Frequently Used Labels

By saving frequently used labels, you will be able to easily recall and print them from next time. Up to 100 labels can be saved.

■ Saving a label

- Press .
- Select "Save" with  and press .
- Select a registration number with  or the number keys and then press .

The registration confirmation screen appears.

- Confirm the registration number and then press .

■ Recall the saved label

- Press .
- Select "Recall" with  and press .
- Select a registration number with  or the number keys and then press .

The recall confirmation screen appears.

- Confirm the registration number and then press .

■ Printing the saved label

You can select multiple files and print them at once.

- Press .
- Select "Print" with  and press .
- Select a registration number with  or the number keys and then press .

By continuously selecting registration numbers and pressing , you can select multiple files.

- Select "Print Start" with  and press .

Printing starts.

MEMO
You can also select "Print Start" by pressing  + .

■ Deleting the saved label

- Press .
- Select "Delete" with  and press .
- Select a registration number with  or the number keys and then press .

The deletion confirmation screen appears.

- Confirm the registration number and then press .

Utilizing Print Functions +

■ Enlarge print

You can create a label that is larger than the width of a single label. Print the created content separately on multiple labels and then put them together to use as a single label.



- Press  + .
- Select "Enlarge print" with  and press .
- Select "*2size" with  and press .
- Select "2/2" with  and press .
- Select "Start print?" with  and press .

Printing starts.

MEMO
The function remains enabled even after printing. To disable the function, select "Off".

■ Mirror print

On Off

- Press  + .
- Select "Mirror print" with  and press .
- Select "On" with  and press .
- Select "Start print?" with  and press .

Printing starts.

MEMO
The function remains enabled even after printing. To disable the function, select "Off".

■ Print copies

...

- Press  + .
- Select "Print copies" with  and press .
- Enter the number of print copies and then press .
- Select "Start print?" with  and press .

Printing starts.

MEMO
The function remains enabled even after printing. To disable the function, set the number of print copies to "1".

Changing the Printer Settings +

Auto cut

Auto cut:
Sets whether or not to cut automatically.

Half cut:
When "Auto cut" is set to "On", the function "Half cut" for precutting just the label part to make the backing paper easy to peel off can be set.

Print density

Sets the print density.

Drop stop

This function is useful for affixing consecutively printed labels one at a time. Select "On" to avoid a printed label from dropping. A printed label stays at the tape eject slot. When printing multiple copies, printing of the second or later labels starts each time you remove a printed label. This function is only available when the label length is 28 mm or more, "Auto cut" is set to "On", and "Half cut" is set to "Off".

Print Speed

Sets the print speed.

Die-Cut pos

Adjusts the text position of die cut label.
Width pos: Adjusts the vertical positioning of text.
Length pos: Adjusts the horizontal positioning of text.

Backlight

Sets the display backlight to On or Off.

Language

You can select the language shown on the display from the following:
Dansk, Deutsch, English, Español, Français, Italiano, Nederlands, Norsk, Português-Br, Português-EU, Suomi, Svenska, Türkçe

inch:cm

The unit of length used to indicate the label size can be switched between inch and cm.

Procedure for setting

- Press  + .
- Select the desired function with  and press .
- Select the desired item with  and press .