

Smart Glasses
MOVERIO
BT-40 / BT-40S

EPSON[®]
EXCEED YOUR VISION

User's Guide

This product is only for use with USB Type-C DisplayPort Alternate Mode.

See the following website for additional information:
<https://tech.moverio.epson.com/en/>




Please read this guide first. Also, make sure you read the "Safety Instructions" sheet supplied before using this product.



© 2020 Seiko Epson Corporation
414016900 EN 2020.07

- ! This product is powered using the battery in your smart device or the Intelligent Controller (hereinafter, these are collectively referred to as the "connected device"). While using the product, keep an eye on the battery level of your connected device.
- The BT-40 does not come with an Intelligent Controller. You need to provide a smart device that supports USB Type-C DisplayPort Alternate Mode.

Included Items and Headset Part Names

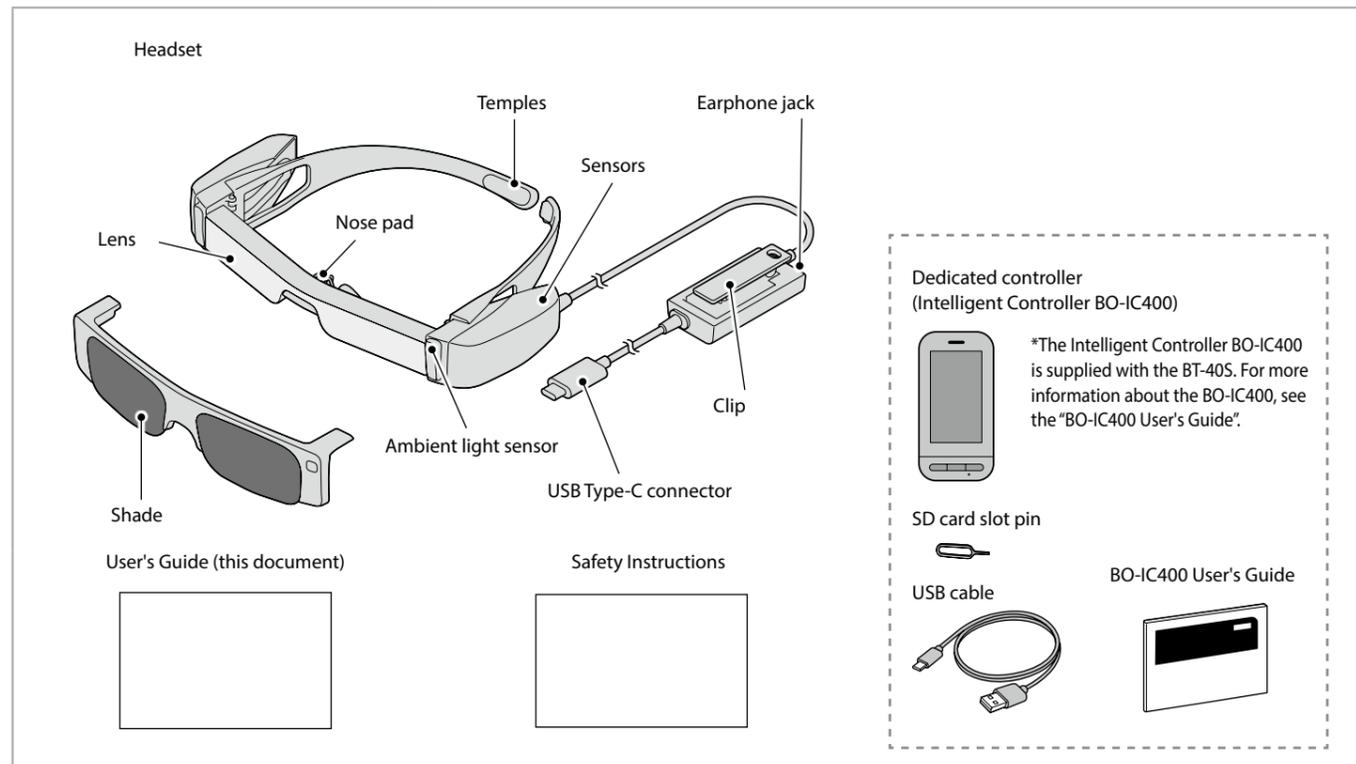

Optional Items

The following optional items are available. These optional items are available as of July 2020. Availability and part numbers vary by region and are subject to change without notice.

- Intelligent Controller BO-IC400*
- Shade Pack BO-SP400
- Nose Pad Pack BO-NP350
- Nose Pad Pack BO-NP300

*Supplied with the BT-40S.


Watching Images

1

While the image is displayed on your connected device, connect the headset's USB Type-C connector to the connected device. Connect commercially available earphones to the earphone jack.



- We recommend using earphones that comply with CTIA standards. Also, when using 3-pin earphones, the microphone function does not work. You may hear some noise when connecting or disconnecting the earphones or USB Type-C connector during content playback, so be sure to take off your earphones first.
- When using apps with a call function, phone calls may be audible from the smart device even if earphones are connected. We recommend checking in advance what happens when you receive a phone call while images are displayed.

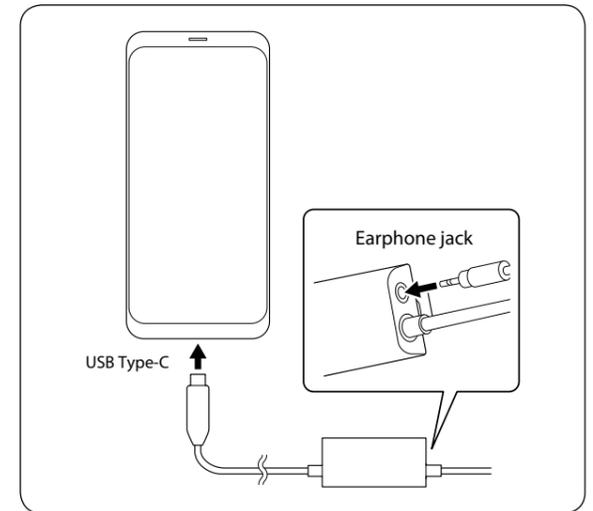

2


Put on the headset and earphones, and then adjust the position of the headset so that you can see the image.



- Do not apply excessive force when opening the temples.
- You can clip the earphone jack to your clothes using the clip. Note that some clothes may be damaged by the clip.



- Turn the screen of your connected device sideways to display the image at full screen size.
 - Turn on the screen rotation feature for the connected device.
- Check the following points if you cannot see the image.
 - The USB Type-C connector is connected correctly (make sure you connect it securely to the connector).
 - The connected device is on, not in sleep mode.
 - Your smart device supports images output in USB Type-C DisplayPort Alternate Mode.

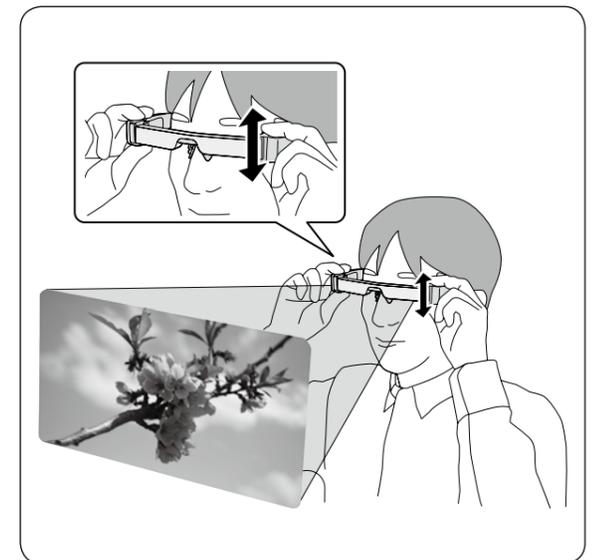

3

If you are using an Android device, you can adjust the brightness of the headset's screen as well as other parameters by using the dedicated app.

BT-40: Install the app "MOVERIO Link" on your smart device using Google Play.
BT-40S: Use "MOVERIO Link Pro" from the app list screen of the Intelligent Controller BO-IC400.

The following outlines the main features of the app.


- Headset screen brightness adjustment
- Power saving mode (on the connected device and the headset)
- Screen lock for the connected devices (to prevent accidental operations)



Adjust the volume on your connected device.

Difficult to View the Screen in Bright Surroundings

You can view the screen easily by attaching the shade supplied. The shade is magnetic and can be attached and removed easily.

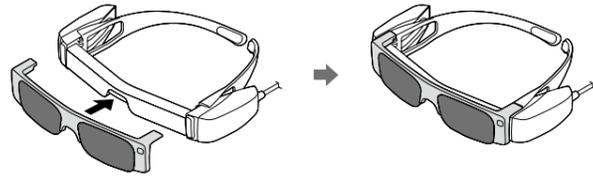

When Wearing over Glasses


You can wear the headset even if you wear glasses.



- Make sure that you do not scratch the headset or your glasses when wearing them.
- The headset cannot be worn over glasses that are wider than approximately 144 mm (5.7 inches).
- You may not be able to wear the headset over the glasses depending on the shape of your glasses.



The nose pad for glasses is worn on the nose from over the glasses.

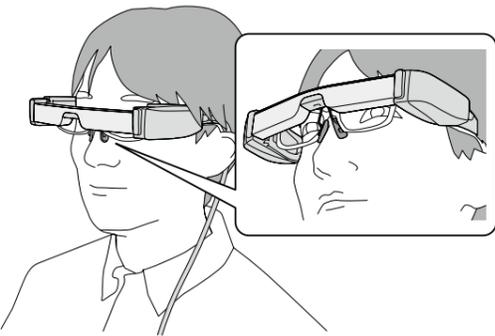


Replacing Nose Pad



When replacing the nose pad, be sure to purchase the option for the BT-40.

Pull the nose pad straight towards you to remove and replace them.

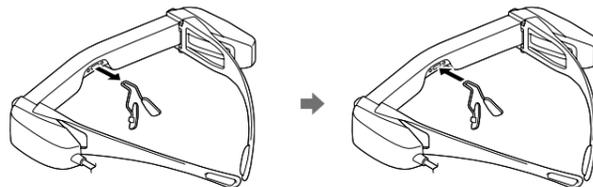


Cleaning the Headset

- If you can see dirt on the screen or if it is foggy, check the lens for dirt such as dust or fingerprints. If there is any dust or dirt attached to the lens, wipe it off with a soft cloth. When wiping the lens, do not use liquids such as lens cleaning solutions or organic solvents.
- If anything except for the lens is dirty, wipe off the dirt with a wet tissue. Do not use a tissue moistened with alcohol-based cleaning liquid.

When the Accuracy of the Headset's Sensor is Low

If the accuracy of the sensor is low in apps that use the headset's geomagnetic sensor, wave the headset in a figure 8 shape while a smart device or Intelligent Controller is connected to calibrate the sensor.

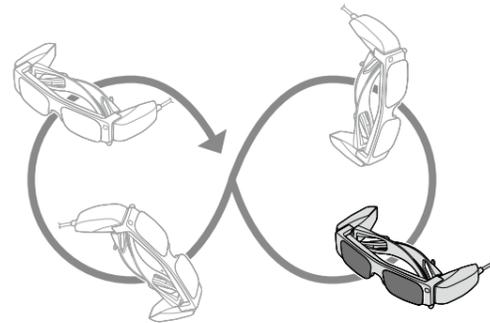

Support Information

The following Website provides information on app development and firmware updates for this product.

<https://tech.moverio.epson.com/en/>

BT-40/BT-40S Headset Specifications

<For customers who have purchased the BT-40S>

For specifications of the supplied Intelligent Controller BO-IC400, see the "BO-IC400 User's Guide".

Model number	BT-40 (H969A)	
Display format	Si-OLED	
Panel size	0.453" wide panel (16:9)	
Resolution	1920 x 1080	
Angle of view	Approximately 34 degrees (diagonally)	
Virtual screen size	60" support (virtual viewing distance 2.5 m [8.2 feet])	
Color reproduction	24 bit color (approximately 16,770,000 colors)	
Connectors	USB Type-C, 4 pin mini jack (earphones with microphone complying with the CTIA standard)*1	
Exterior dimensions (W x D x H)	194 x 164 x 41 mm (7.6 x 6.5 x 1.6 inches) (without the shade)	
Mass	Approx. 165 g (5.8 ounces)	
	Without the shade, cables, and so on	Approx. 95 g (3.4 ounces)
Earphone output	Max. voltage 150 mVrms or less Voltage with broadband characteristics 75 mVrms or more	
Sensors	Geomagnetic sensor/accelerometer sensor/gyroscopic sensor/ambient light sensor	
Operating temperature	5 to 35°C (41 to 95°F), humidity 20 to 80% (no condensation)	
Storage temperature	-10 to 60°C (14 to 140°F), humidity 10 to 90% (no condensation)	
Water resistance	IPX2 (except for USB port)	
Reliability	Life span	20,000 hours (based on our evaluation conditions*2, such as when the brightness of the screen drops below 50% of its initial level, indicating the point at which the product enters the wear out failure period. Screen burn-in does not indicate a malfunction.)
	Mean-Time Between Failure (MTBF)	180,000 hours (Failure means a random failure during the random failure period.)

*1 Restrictions in operation may occur, such as buttons not operating, even when using a compliant plug.

*2 The screen brightness was set to the default value of 12/20, and the evaluation movie with an average gradation of 98/255 was displayed continuously in an environment of 25°C. If the screen brightness (brightness setting and display gradation) is brighter than the evaluation conditions, the life span will be reduced.

Video Input

USB Type-C	Video interface	DisplayPort Alternate Mode (DP Alt Mode)
	Resolution (frame rate)	1080 p (60 Hz)
	HDCP	Supported

Data Communication

USB Type-C	USB 2.0	
Supported operating systems	Windows	Windows 10 or later
	Android	Android 8 or later

Power

USB Type-C	USB Power Delivery	
Electricity consumption	Rated power consumption	4.5 W
	Rated voltage/Rated current	5.0 V/0.9 A

Notes on Water Resistance

This product is IPX2-compliant with daily water resistance performance based on the IEC60529 standard. However, this does not include the USB Type-C connector. (This is not based on an evaluation by a third-party evaluator)

<Water resistance level compliant with IPX2>

If the product is subjected to a dripping water test at a rate of 3 mm/minute for up to 10 minutes while the product is at an angle of 15 degrees, water does not enter the product and it can be operated normally.

- The water resistance feature does not guarantee protection against damage or malfunctions under all conditions. The warranty is invalid if malfunctions are determined to have occurred due to incorrect handling of the product by the user.
- When connecting or disconnecting the product's USB Type-C connector with a connected device, do not touch it with wet hands and do not expose it to water or dust. If small debris such as hair or sand gets caught in the ports, the water resistance performance of the product will be compromised.
- Do not allow other liquids (such as organic solvents, soapy water, hot spring water, and seawater) to splash onto the product.
- Do not leave the product in locations subject to humidity such as bathrooms.
- If rain or water splashes onto the product, wipe it with a dry cloth as soon as possible.

Trademarks

"EPSON" is a registered trademark of the Seiko Epson Corporation.

"EXCEED YOUR VISION" is a registered trademark or a trademark of the Seiko Epson Corporation.

Windows is a registered trademark of the Microsoft Corporation in the USA and other countries.

USB Type-C™ is a trademark of the USB Implementers Forum.

Android and Google Play are trademarks of Google LLC.

Other product names used herein are also for identification purposes only and may be trademarks of their respective owners. Epson disclaims any and all rights in those marks.

Smart Glasses

MOVERIO BT-40 / BT-40S

EPSON[®]
EXCEED YOUR VISION



414017300

Safety Instructions

A dedicated controller (Intelligent Controller BO-IC400) is supplied with the BT-40S. For more information about the BO-IC400, see the “BO-IC400 User’s Guide”.

© 2020 Seiko Epson Corporation
2020.07

For your safety, read the attached documents carefully to use the product correctly. After you have read the documents, keep them in a safe place so that you can refer to them quickly at a later date.

■ Safety symbols

	Warning	This symbol indicates information that, if ignored, could possibly result in serious personal injury or even death due to incorrect handling.
	Caution	This symbol indicates information that, if ignored, could possibly result in personal injury or physical damage due to incorrect handling.

■ General information symbols

	Indicates procedures which may result in damage or injury if sufficient care is not taken.
	Indicates additional information and points which may be useful to know regarding a topic.

Warning Usage environment and condition precautions

Only use this product at the stated power-supply voltage.

For your own safety, disconnect the product’s cable from the smart device or Intelligent Controller when you are not using this product. The insulation may deteriorate, which may result in electric shock, fire, or malfunction.

Do not leave this product in locations subject to temperatures beyond the specified operating range, such as cars with the windows closed, in direct sunlight, or in front of air-conditioning or heater outlets. Also, avoid locations subject to sudden changes in temperature. Doing so may result in fire, breakdown, malfunction, or failure.

Do not touch the connectors and cables for each of the connector ports with wet hands. Failure to comply with these precautions could result in fire, burns, or electric shock.

When connecting or disconnecting the USB Type-C connector, do not apply excessive force such as pulling on the cord, and make sure you insert it straight into the port you want to connect to. Insecure or incorrect connections could result in fire, burns, or electric shock.

Do not use the product in locations where it may get wet or is subject to high levels of humidity such as in a bath or shower. Failure to comply with these precautions could result in fire or electric shock.

Do not place this product in locations subject to smoke, steam, high humidity, or dust such as kitchen counters or near humidifiers. Doing so may result in fire, electric shock, or deterioration in image quality.

Do not cover this product with a cloth or similar material during use. Doing so may change the shape of the case through heat, or fire.

The earphone jack part may become hot during operation. Note the following points to prevent low temperature burns.

- Attach the clip to your clothing so that the earphone jack part does not come into direct contact with your skin.
- Do not allow the earphone jack to be in contact with your skin for too long, even if it is over clothing.

Do not expose the lens to direct sunlight for a long time. Doing so may result in fire or explosion due to condensed beams of light from the lens.

Warning Product usage precautions

The headset and shade use a powerful magnet. For your own safety, do not use the shade if you have implanted technology such as a pacemaker.

For your own safety, note the following points when connecting this product to a smart device or the Intelligent Controller.

- Laws and regulations prohibit viewing the screens of smart devices or the Intelligent Controller while driving a car, motorbike, or riding a bicycle.
- Be sure to follow all safety precautions provided with your smart device or Intelligent Controller, cautions on usage, and any other important warnings.

Do not start using this product at a high volume. Doing so may result in hearing impairment. Lower the volume before turning off the product, and gradually increase the volume after turning on the product. To prevent possible hearing damage, do not listen at high volume (high sound pressure) for prolonged periods of time.

Do not allow any conductive foreign objects to touch the USB Type-C connector and earphone jack, and make sure no conductive foreign objects enter the connection ports. Doing so may cause a short circuit and result in fire or electric shock.

Do not allow solvents such as alcohol, benzene, or thinner to touch the product. Also, do not clean this product with a wet cloth or solvents. Doing so may warp or crack the product housing and may result in electric shock, malfunction, or fire.

The product housing should only be opened by qualified service personnel. Also, do not disassemble or remodel the product. Many of the parts inside the product carry a high voltage and could cause fire, electric shock, accident, or poisoning.

Do not subject the lens of the product to strong shocks or knock it against hard objects. If the lens is damaged, it could splinter and cause serious injuries to the eyes and face.

Do not throw the product into a fire and do not heat the product. Do not place objects with naked flames, such as candles, on this product. Doing so may result in heat, fire, or explosion.

This device is not certified as a medical device as defined by acts regarding medical products and medical devices. It can be used as an auxiliary monitor for the main monitor attached to medical devices, but do not use it for surgery or when determining diagnostic images that require high reliability. This product has not been certified by the IEC60601-1 standard. When this product is incorporated into a medical system, the entire system must conform to the standard requirements.

Warning Viewing image precautions

Do not wear this product while driving a car, riding a motor bike or bicycle, or performing any other dangerous tasks. Doing so may result in accident or injury.

Do not use this product in unstable locations such as stairs or at altitude. Also, do not use the product while walking in dangerous locations such as near machinery or equipment that might get caught on the cables, where there is a lot of traffic, or where it is dark. Doing so may result in accident or injury.

When walking while viewing images on the product, be aware of your surroundings. If you are too focused on the image, it could result in accidents, falling down, and colliding with other people.

When viewing in dark locations, it is difficult to see your surroundings due to the brightness of the image. Be aware of your surroundings.

When using this product in small locations, be aware of your surroundings.

When wearing this product, do not look directly at the sun or other light sources even if you are using the shade. This could cause serious injury to your eyes or loss of eyesight.

Make sure the cable does not catch on anything in the surrounding area while wearing the product. Also, make sure the cable does not wind around your neck. Doing so may result in accident or injury.

Make sure the cable does not get damaged. Otherwise, it may result in fire or electric shock.

- Do not damage the cable.
- Do not place heavy objects on top of the cable.
- Do not bend, twist, or pull the cable with excessive force.
- Keep the power cable away from hot electrical appliances.

Warning Product abnormality precautions

In the following situations, unplug the power supply cable, and contact your local dealer or the Epson service call center. Continuing to use under these conditions may result in fire or electric shock. Do not try to repair this product yourself.

- If you see smoke, or notice any strange odors or noises.
- If any water, beverages, or foreign objects get into the product.
- If the product was dropped or the case was damaged.

Caution Usage environment and condition precautions

Do not place the product in locations subjected to vibrations or shocks.

While using the product to view images, play games, or listen to music, make sure you confirm the safety of your surroundings and do not leave any fragile items in your immediate vicinity. The images you are viewing may cause you to move your body involuntarily, resulting in damage to nearby items or personal injury.

Do not place this product near high-voltage lines or magnetized items. Doing so may result in breakdown, malfunction, or failure.

When performing maintenance, make sure you unplug the power supply cable and disconnect all wires. Otherwise, it may result in electric shock.

Caution Product usage precautions

Since the headset and shade use a powerful magnet, be sure to note the following points.

- Do not touch the shade’s magnet directly to bare skin. Doing so could cause skin irritation to occur.
- Do not place it near items that are affected by magnetism such as smart devices, magnetic cards, compasses, clocks, and so on.
- Remove any metallic foreign objects and so on that stick to the magnet of the headset and shade.

Stop using this product if the skin that touches the product (face and so on) feels itchy when wearing the product, or any unusual rashes occur, and consult your local dermatologist.

If you sweat while using the product, wipe the sweat from your face and the product. Continuing to use under these conditions may result in itching or a rash.

For your own safety, do not use a conversion adapter or extension cable. Failure to comply with these precautions could result in fire, burns, electric shock, or damage to the product.

Use the clip on the back of the earphone jack to secure it to your clothes so that cables are not placed under undue force.

Dispose of this product in accordance with your local laws and regulations.

Caution Viewing image precautions

Always take periodic breaks when viewing images using this product. Long periods of viewing images may result in eye fatigue. If you feel fatigued or uncomfortable even after taking a break, stop viewing immediately.

Do not drop this product or treat it with unnecessary force. Also, if the product breaks due to an impact such as a fall, stop using the product. Damage to the product may result in injury.

When wearing this product, be aware of the edges of the temples to avoid injury.

Make sure you are wearing this product correctly. Incorrect usage could make you feel nauseous.

This product should only be used for the purposes stated in the manuals. Doing otherwise may result in injury.

If a problem or malfunction occurs, stop using this product immediately. Continuing to use this product may result in injury or could make you feel nauseous.

How a 3D image is perceived varies depending on the individual. Stop using the 3D function if you feel strange or cannot see in 3D. Continuing to view the 3D images could make you feel nauseous.

This product must not be used by children under the age of six as their eyesight is still developing.

If a child of seven years or older uses the product, make sure they are supervised at all times and that they do not wear the product for extended periods. Pay close attention to the child’s physical condition and make sure they are not suffering from eye strain.

Do not use this product if you are sensitive to light, or feel nauseous. Doing so may aggravate your pre-existing conditions.

Do not use this product if you have prior eye conditions. Doing so may aggravate the symptoms such as strabismus, amblyopia, or anisometropia.

It is the customer’s responsibility to check in advance that the product can be used in the environment in which the customer wishes to use the product.

Notes on Usage

This product uses an Si-OLED (Organic EL Panel) for the display panel. Due to the general characteristic of the Si-OLED, you may notice burn-in (afterimages) or decreasing luminance on the panel. This is not a malfunction.

- To reduce burn-in and decreasing luminance, do the following.
- Turn off the headset display when it is not in use.
 - We recommend using the MOVERIO Link/MOVERIO Link Pro in power-saving mode (default). (You can download MOVERIO Link from Google Play.)
 - Do not display the same image for a long time.
 - Hide markers or text that always appear in the same position.
 - Do not brighten the screen more than necessary.

Be sure to consider other people when using this product in public locations.

List of Safety Symbols and Instructions

The following table lists the meaning of the safety symbols labeled on the equipment.

Symbol mark	Approved standards	Description
	IEC60417 No.5007	"ON" (power) To indicate connection to the mains.
	IEC60417 No.5008	"OFF" (power) To indicate disconnection from the mains.
	IEC60417 No.5009	Stand-by To identify the switch or switch position by means of which part of the equipment is switched on in order to bring it into the stand-by condition.
	ISO7000 No.0434B IEC3864-B3.1	Caution To identify general caution when using the product.
	IEC60417 No.6042 ISO3864-B3.6	Caution, risk of electric shock To identify equipment that has risk of electric shock.
	IEC60417 No.5957	For indoor use only To identify electrical equipment designed primarily for indoor use.
	IEC60417 No.5926	Polarity of d.c. power connector To identify the positive and negative connections (the polarity) on a piece of equipment to which a d.c. power supply may be connected.

Symbol mark	Approved standards	Description
	IEC60417 No.5017	Earth To identify an earth (ground) terminal.
	IEC60417 No.5032	Alternating current To indicate on the rating plate that the equipment is suitable for alternating current only; to identify relevant terminals.
	IEC60417 No.5031	Direct current To indicate on the rating plate that the equipment is suitable for direct current only; to identify relevant terminals.
	IEC60417 No.5172	Class II equipment To identify equipment meeting the safety requirements specified for Class II equipment according to IEC 61140.
	ISO 3864	General prohibition To identify actions or operations that are prohibited.
	ISO 3864	Contact prohibition To indicate injury that could occur due to touching a specific part of the equipment.
	IEC60417 No.5266	Standby, partial standby To indicate that part of the equipment is in the ready status.

General Notes

Restriction of Use This product is manufactured based on the specifications of the country of sale. When using this product outside the country of sale, contact your nearest support center. When this product is used for applications requiring high reliability/safety such as transportation devices related to aviation, rail, marine, automotive; disaster prevention devices; various safety devices; or functional/precision devices, you should use this product only after giving consideration to including fail- safes and redundancies into your design to maintain safety and total system reliability. Because this product was not intended for use in applications requiring extremely high reliability/safety such as aerospace equipment, main communication equipment, nuclear power control equipment, or medical equipment related to direct medical care, please make your own judgment on this product's suitability after a full evaluation.

Authentication information	U.S.A/Canada	Europe
		

Supplier's DECLARATION of CONFORMITY According to 47CFR, Part 2 and 15 Class B Personal Computers and Peripherals; and/or CPU Boards and Power Supplies used with Class B Personal Computers
We : Epson America, Inc.
Located at : 3131 Katella Avenue, Los Alamitos, CA
Tel : 562-981-3840
Declare under sole responsibility that the product identified herein, complies with 47CFR Part 2 and 15 of the FCC rules as a Class B digital device. Each product marketed, is identical to the representative unit tested and found to be compliant with the standards. Records maintained continue to reflect the equipment being produced can be expected to be within the variation accepted, due to quantity production and testing on a statistical basis as required by 47CFR 2.909.
Trade Name : EPSON
Type of Product : Smart Glasses
Model : H969A

FCC Compliance Statement This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING
The connection of a non-shielded equipment interface cable to this equipment will invalidate the FCC Certification or Declaration of this device and may cause interference levels which exceed the limits established by the FCC for this equipment. It is the responsibility of the user to obtain and use a shielded equipment interface cable with this device. If this equipment has more than one interface connector, do not leave cables connected to unused interfaces. Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Canada	CAN ICES-3 (B)/NMB-3(B)
	This Class B digital apparatus complies with Canadian ICES-003. Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Indication of the manufacturer and the importer in accordance with requirements of EU directive	Manufacturer: SEIKO EPSON CORPORATION Address: 3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan Telephone: 81-266-52-3131 http://www.epson.com/	Importer: EPSON EUROPE B.V. Address: Atlas Arena, Asia Building Hoogoorddreef 5, 1101 BA Amsterdam Zuidoost The Netherlands Telephone: 31-20-314-5000 http://www.epson.eu/
---	---	---

Contact List

This address list is current as of July 2020.

A more up-to-date contact address can be obtained from the corresponding website listed here. If you do not find what you need on any of these pages, please visit the main Epson home page at www.epson.com.

EUROPE, MIDDLE EAST & AFRICA

ALBANIA ITD Sh.p.k. http://www.itd-al.com	AUSTRIA Epson Deutschland GmbH https://www.epson.at	BELGIUM Epson Europe B.V. Branch office Belgium https://www.epson.be	BOSNIA AND HERZEGOVINA NET d.o.o. Computer Engineering https://netcomp.rs	BULGARIA Epson Service Center Bulgaria http://www.kolbis.com
CROATIA MR servis d.o.o. http://www.mrservis.hr	CYPRUS A.T. Multitech Corporation Ltd. http://www.multitech.com.cy	CZECH REPUBLIC Epson Europe B.V. Branch Office Czech Republic https://www.epson.cz	DENMARK Epson Denmark https://www.epson.dk	ESTONIA Epson Service Center Estonia https://www.epson.ee
FINLAND Epson Finland https://www.epson.fi	FRANCE & DOM-TOM TERRITORY Epson France S.A. https://www.epson.fr	GERMANY Epson Deutschland GmbH https://www.epson.de	GREECE Info Quest Technologies S.A. https://www.infoquest.gr	HUNGARY Epson Europe B.V. Branch Office Hungary https://www.epson.hu
IRELAND Epson (UK) Ltd. https://www.epson.ie	ISRAEL Epson Israel https://www.epson.co.il	ITALY Epson Italia s.p.a. https://www.epson.it	KAZAKHSTAN Epson Kazakhstan Rep. Office https://www.epson.kz	LATVIA Epson Service Center Latvia https://www.epson.lv
LITHUANIA Epson Service Center Lithuania https://www.epson.lt	LUXEMBURG Epson Europe B.V. Branch office Belgium https://www.epson.be	NORTH MACEDONIA Digit Computer Engineering http://digit.net.mk	NETHERLANDS Epson Europe B.V. Benelux sales office https://www.epson.nl	NORWAY Epson Norway https://www.epson.no
POLAND Epson Europe B.V. Branch Office Poland https://www.epson.pl	PORTUGAL Epson Ibérica S.A.U. Branch Office Portugal https://www.epson.pt	ROMANIA Epson Europe B.V. Branch Office Romania https://www.epson.ro	RUSSIA Epson CIS http://www.epson.ru	UKRAINE Epson Kiev Rep. Office http://www.epson.ua
SERBIA Nepo System d.o.o. https://neposystem.rs AIGO Business System d.o.o. Beograd https://aigo.rs	SLOVAKIA Epson Europe B.V. Branch Office Czech Republic https://www.epson.sk	SLOVENIA Birotehna d.o.o. http://www.birotehna.si	SPAIN Epson Ibérica, S.A.U. https://www.epson.es	SWEDEN Epson Sweden https://www.epson.se
SWITZERLAND Epson Deutschland GmbH Branch office Switzerland https://www.epson.ch	TURKEY Tecpro Bilgi Teknolojileri Tic. ve San. Ltd. Sti. http://www.tecpro.com.tr	UK Epson (UK) Ltd. https://www.epson.co.uk	AFRICA https://www.epson.co.za or https://www.epson.fr	SOUTH AFRICA Epson South Africa https://www.epson.co.za
MIDDLE EAST Epson (Middle East) https://www.epson.ae				
NORTH, CENTRAL AMERICA & CARIBBEAN ISLANDS				
CANADA Epson Canada, Ltd. https://epson.ca	COSTA RICA Epson Costa Rica, S.A. https://epson.co.cr	MEXICO Epson Mexico, S.A. de C.V. https://epson.com.mx	ECUADOR Epson Ecuador https://epson.com.ec	U. S. A. Epson America, Inc. https://epson.com/usa
SOUTH AMERICA				
ARGENTINA Epson Argentina S.R.L. https://epson.com.ar	BRAZIL Epson do Brasil https://epson.com.br	CHILE Epson Chile S.A. https://epson.cl	COLOMBIA Epson Colombia Ltd. https://epson.com.co	PERU Epson Peru S.A. https://epson.com.pe
VENEZUELA Epson Venezuela S.A. https://epson.com.ve				
ASIA & OCEANIA				
AUSTRALIA Epson Australia Pty. Ltd. https://www.epson.com.au	CHINA Epson (China) Co., Ltd. https://www.epson.com.cn	HONG KONG Epson Hong Kong Ltd. https://www.epson.com.hk	INDIA Epson India Pvt., Ltd. https://www.epson.co.in	INDONESIA PT. Epson Indonesia https://www.epson.co.id
JAPAN Seiko Epson Co. Toyoshina Plant https://www.epson.jp	KOREA Epson Korea Co., Ltd. http://www.epson.co.kr	MALAYSIA Epson Malaysia Sdn. Bhd. https://www.epson.com.my	NEW ZEALAND Epson New Zealand https://www.epson.co.nz	PHILIPPINES Epson Philippines Co. https://www.epson.com.ph
SINGAPORE Epson Singapore Pte. Ltd. https://www.epson.com.sg	TAIWAN Epson Taiwan Technology & Trading Ltd. https://www.epson.com.tw	THAILAND Epson (Thailand) Co.,Ltd. https://www.epson.co.th		